

17700 SERIES

QAM SINGLE CHANNEL DELETION FILTER



Application:

Deletes an entire QAM channel for the purpose of reinserting alternate programming (e.g. - Instructional, Security Camera, etc.).




R17700 Rack Mount

Product Features:

- Utilizes High "Q" Components for Optimum Performance
- Preserves Adjacent QAM or Analog Channels
- Operating Bandwidth: 5 MHz to 1 GHz
- Available in Plate Mount or Rack Mount Configurations
- Multi-Channel Configurations Available Upon Request

Specifications:

- Channel Availability: 2 - 135
- Channel Rejection; 40 dB (Min.)
- Adjacent QAM Channel Loss: 3 dB (Typ.); 4 dB (**Max.**)
- Adjacent QAM Channel Delay Variation: 400 nS (**Max.**)
- 75 ohms / F-female Connectors

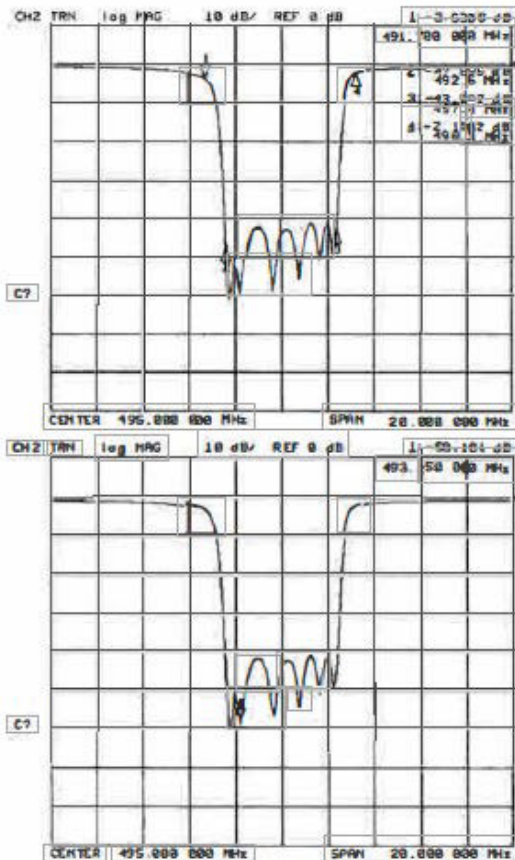

Ordering Information: 17700-(channel#)- Plate Mount (for Wall or Table Installation)
R17700-(channel#)- Rack Mount

