


FEATURES

- High-power, multiport EDFA for RFoG and RFPON applications
- Up to 21 dBm output power to each of 8 ports
- Front panel laser On/Off key lock switch
- Hot plug-in/out
- Local and remote status monitoring and control

The CommScope FA3530M is a high performance, multiport 1550 nm optical amplifier. The high-power output of this amplifier is ideally suited for video distribution in RFoG and RFPON network architectures.

In RFoG applications, the 8-port FA3530M EDFA at the headend amplifies and distributes the 1550 nm broadcast video signal to over 250 residential customers, over 8 typical RFoG network segments, each with 32 connected endpoint devices.

The compact multiport module is installed and managed side by side in the same chassis as other required equipment. The FA3530M can connect directly to two of the CommScope OR3144H RFoG Diplexer/Return Receiver modules to complete your RFoG solution. The FA3530M can also be used with the AR3044H Receiver and the appropriate RFoG filter optical passive. This greatly simplifies the management of headend and hub deployments for RFoG, RFPON, and FTTH networks.

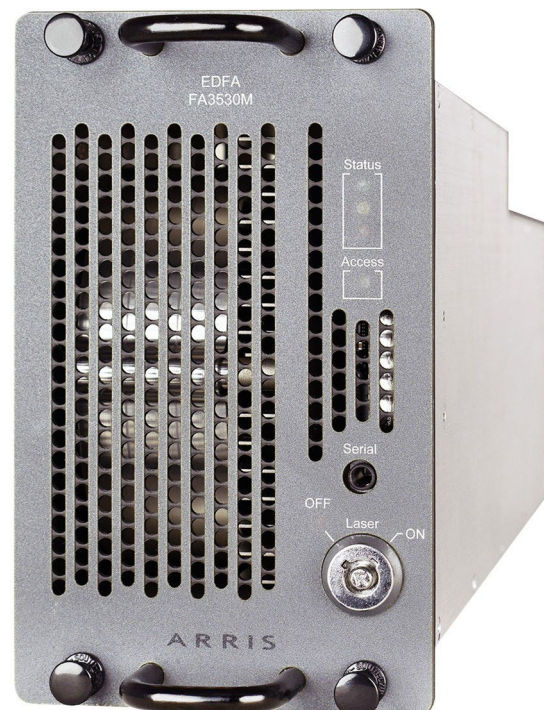

SPECIFICATIONS

Characteristics	Specification
Physical	
Dimensions (without Connectors)	
Three-slot wide	13.0" D x 4.3" H x 3.0" W (3RU) (33 cm x 11 cm x 7.5 cm)
Weight	5.0 lbs (2.3 kg)
Environmental	
Operating Temperature Range	0° to +50°C (32° to 122°F)
Storage Temperature Range	-40° to +85°C (-40° to 185°F)
Humidity	5% to 95% non-condensing
General	
	Hot plug-in/out
Modes of Operation	Constant current
Output Power Adjustment	Manual
Optical Interface	
Optical Connector	LC/APC located on Back Plate BP-F14
Optical	
Input Signal Wavelength	1540 to 1565 nm
Input Power Range	-10 to +10 dBm
Optical Signal Path Isolation	30 dB Min
Output Power Stability	± 0.3 dB
Output Power Adjustment Range	0 to -3.0 dB from nominal output power
Performance Parameters	
Output Power, Nominal	8x21 dBm
Power Consumption, Max	40 Watts
Noise Figure, Max ¹	6.5 dB


NOTE:

1. Measured optically at 0 dBm input, $\lambda = 1550$ nm in vacuum, $T_A = 25^\circ\text{C}$

ORDERING INFORMATION

Model Name	Description
FA3530M-08-00-AL	Multiport Fiber Amplifier (EDFA), 8 Ports, LC/APC Connectors, with BP-F14 Back Plate

Required Module Back Plate: BP-F14
Included with FA3530M-08-00-AL module

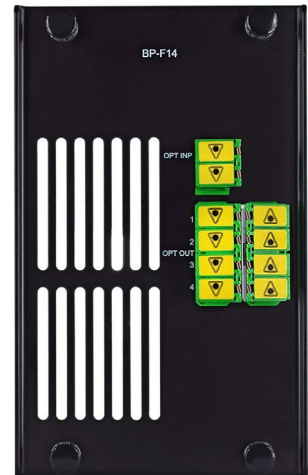

RELATED PRODUCTS

CH3000 Chassis	AR3044H Receiver
Optical Transmitters	OR3144H RFoG Diplexer
Optical Passives	Installation Services



Note: Specifications are subject to change without notice.

Copyright Statement: © 2022 CommScope, Inc. All rights reserved. ARRIS and the ARRIS logo are trademarks of CommScope, Inc. and/or its affiliates. All other trademarks are the property of their respective owners. No part of this content may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from CommScope, Inc and/or its affiliates ("CommScope"). CommScope reserves the right to revise or change this content from time to time without obligation on the part of CommScope to provide notification of such revision or change.

87-10497-Rev L_FA3530M_EDFA