



5311XP

Reimagine Your Edge

5311XP XGS-PON SFP+ ONT

XGS-PON ONT for Bridging Applications in a Standard SFP Enclosure

Features & Benefits

- + Compliant with ITU-T G.9807.1 XGS-PON Standard
- + Supports Symmetrical 10Gbps Data Rates.
- + MSA-Compliant SFP+ Footprint with SC/APC receptacle.
Ideal for FTTH, Mobile Backhaul, and
- + Business Deployments
IEEE 1588v2 and Y.1731 Support
- + Triple-Play QoS and Multicast Video
- +

The DZS 5311XP is a complete XGS-PON ONT in an SFP (Small Form-factor Pluggable) package. Bridging applications are now easier to deploy with this MSA-compliant XGS-PON SFP inserted into a suitable host device. The 5311XP SFP ONT delivers a full range of advanced IP voice, data, and video services over an all-optical broadband access network.

The 5311XP SFP ONT is ideal for converting the network side of a device from a legacy Ethernet connection to a high-speed XGS-PON link. Ethernet switches, routers, set-top boxes, and DZS V1 Velocity Ethernet access products are just some of the devices that may host the 5311XP SFP ONT in their on-board SFP port. The customer side presents a full-duplex 10Gb link with wire-speed throughput. No external power supply is required for the 5311XP SFP ONT.

Dying-Gasp support alerts the network operator of loss of power to the host device, or removal of the 5311XP SFP ONT, helpful for problem identification in remote areas. The 5311XP SFP ONT is hot-pluggable and easy to install. Its small footprint makes it ideal for use where space or physical access to AC power is difficult. Compliant with standard OMCI definitions, the 5311XP ONT is manageable at remote sites and supports the full range FCAPS functions including supervision, monitoring, and maintenance. Provisioning may be accomplished using Dynamic OMCI or DZS Xtreme Access Management System.

5311XP XGS-PON SFP+ ONT

5311XP



Service Scenario

The XGS-PON network consists of an Optical Line Termination (OLT) located at the Central Office, and a set of residential Single-Family Unit (SFU) and Multi Dwelling Unit (MDU) locations with Optical Network Terminals (ONTs). Between them is the optical distribution network (ODN) comprised of fibers, passive optical splitters, and couplers.

The 5311XP ONT supports 10 Gigabit symmetrical data using the XGS-PON standard. Services include High-Speed Internet (HIS), Packet Voice, IPTV, OTT video, and cloud-enabled services to multi-media devices.

Key Service Attributes

- + FSAN ITU-T G.9807.1 XGS-PON compliant
- + 10Gbps symmetrical services
- + MTU jumbo frame 9216-byte support
- + IPTV multicast, IGMPv2 and IGMPv3 services
- + Any-port, Any-service data model
- + Traffic management including Q-in-Q tagging, 802.1Q VLANs, multiple subscriber VLANs, per-port rate limiting
- + 802.1p priority bits, DiffServ and priority queues based on services types.
- + IEEE 1588v2 and Y.1731 Support
- + Dying-gasp notification
- +

5311XP XGS-PON SFP+ ONT

5311XP

Product Specifications

Dimensions

- + MSA-compliant SFP+ enclosure
- + 72mm L x 14mm W x 12mm H
- + Length beyond SFP cage: 24mm

Weight

- + 31g (with dust cover)
- + 48g (packaged in giftbox)

Power

- + Input: 3.3VDC +/- 5%, 900mA max.
- + Power Consumption (25C): 2.5W typ.

Interfaces

- + WAN: XGS-PON SC/APC receptacle
- + System: 10G SFI, 1000BaseX, 2500BaseX

XGS-PON

- + Compliant with ITU-T G.9807.1 XGS-PON Standard
- + Bi-directional 9.953Gbps
- + Transmitter: Burst-mode, 1270nm, +4.0 to +9 dBm launch power
- + Receiver: Continuous-mode, 1577nm, -28 dBm sensitivity
- + Forward Error Correction (FEC) per G.989.3
- + Dying Gasp

Quality of Service

HW-based internal IEEE 802.1p (CoS)

- + Strict Priority (SP)
- + 802.1Q (VLAN tag) QoS mapping ToS/CoS

- + 8 queues per port
- + Classified traffic can be tagged with VLAN ID and Ethernet Priority bit, and can be assigned to priority queues

- + Classify packets into different IEEE 802.1p priority queues according to DSCP values (RFC 2475)
- + The range of traffic shaping or rate-limit shall be between 64 Kbps to the maximum port rate with 64kbps granularity. The accuracy error shall be less than ±10%.

- + DSCP IP CoS (RFC 2475)

Software Features

- + IEEE802.1D and IEEE802.1Q
- + Address learning with auto aging
- + L2/BPDU Filter
- + Support 4096 MAC learning addresses
- + Multiple T-CONTs/GEM ports per device
- + Flexible mapping between GEM port and T-CONT
- + Priority queues and scheduling upstream

- + Activation with automatic discovered serial Number and password

- + Multicast: IGMP v2, v3, IGMP snooping

- + PtP and SLA
- + IEEE 1588v2
- + ITU-T Y.1731

Environmental

- + Operating case and storage temperature: -40~185°F (-40~85°C)
- + Operating humidity 10 to 95% (non-condensing)
- + Altitude: -200 to 10,000 feet (-61 to 3,048 m) above sea level

Management

- + ITU-T 984.1/G988 compliant OMCI interface
- + CLI over telnet
- + Web GUI

Compliance

- + FCC Part 15 Class B
- + ICES-003 Class B
- + EN55022, EN55024
- + IEC 62368-1
- + FDA IEC 60825-1
- + RoHS 2015/863/EU

5311XP XGS-PON SFP+ ONT

5311XP

Detailed Specifications

Absolute Maximum Ratings

Parameter	Storage	Symbol	Min.	Typ.	Max.	Unit	Note
Temperature		Ts	-40		85	°C	
Storage Ambient Humidity		HA	5		85	%	
Power Supply Voltage		VCC	-0.3		3.7	V	
Signal Input Voltage			-0.3		Vcc+0.3	V	
Receiver Damage Threshold			+3			dBm	
Lead Soldering Temperature		TSOLD			260	°C	
Lead Soldering Time		TSOLD			10	sec	

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note	
Case Operating Temperature 1	Tcase	-40		85	°C	I- T EMP	
Ambient Humidity	HA	5		70	%	Non-condensing	
Power Supply Voltage	VCC	3.13	3.3	3.47	V		
Power Supply Current	ICC			900	mA		
Power Dissipation				3	W		
Power Supply Noise Rejection				100	mVp-p	100Hzto 1MHz	
DataRate			9.953/9.953		Gbps	TxRate/RxRate	
Transmission Distance				20	km		
Coupled fiber		Single mode fiber					9/125um

5311XP XGS-PON SFP+ ONT

5311XP

Transmitter

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Average Launched Power	PO	4		9	dBm	
Extinction Ratio	ER	6			dB	
Center Wavelength	λ_C	1260	1270	1280	nm	DFBLaser
Side mode suppression ratio	SMSR	30			dB	
Spectrum Bandwidth (-20dB)				1	nm	
Transmitter OFF Output Power	POff			-45	dBm	
TxBurstonetime	Ton			50	ns	
TxBurstofftime	Toff			50	ns	
Differential line input Impedance	RIN	90	100	110	Ohm	
Differential Data Input Swing	VDT	200		1600	mVp-p	
Input Common Mode Voltage	VCM	1.4		Vcc-0.2	V	
Output Eye Mask	Compliant With ITU-TG.987.2					

Receiver

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Input Optical Wavelength	λ_{IN}	1575		1580	nm	CWAPD
Receiver Sensitivity	PIN			-28.5	dBm	Note(1)
Input Saturation Power (Overload)	PSAT	-8			dBm	
Signal Detect-Assert Power	PA	-42			dBm	
Signal Detect-Deassert Power	PD			-29	dBm	Note(2)
Signal Detect-Hysteresis	PA-PD	0.5		5	dB	
Differential Data Output Swing	VDR	350		850	mVp-p	AC-Coupled CML
Signal Detect Output Voltage-High	VLOSH	2.4		VCC	v	LVTTTL
Signal Detect Output Voltage-Low	VLOSL	0		0.4	v	
Signal Detect-Assert/Deassert Time				100	us	
RSSI range		-29		-8	dBm	Accuracy +/-3dB

Note (1): Measured with PRBS 2³¹-1 test pattern @9.953Gbit/s, BER ≤1×10⁻³.

Note (2): When SD de-asserted, the data output is signal output.

5311XP XGS-PON SFP+ ONT

5311XP

Receiver



Parameter	Symbol	Min.	Typ.	Max	Unit	Note
Input Optical Wavelength	λ_{IN}	1575			nm	CWAPD
Receiver Sensitivity	PIN			158	dBm	Note(1)
Input Saturation Power (Overload)	PSAT	-8		0	dBm	
Signal Detect-Assert Power	PA	-42		-2	dBm	
Signal Detect-Deassert Power	PD			8.5 -29	dBm	Note(2)
Signal Detect-Hysteresis	PA-PD	0.5		5	dB	
Differential Data Output Swing	VDR	350		850	mVp-p	AC-Coupled CML
Signal Detect Output Voltage-High	VLOSH	2.4		VCC	v	LVTTTL
Signal Detect Output Voltage-Low	VLOSL	0		0.4	v	
Signal Detect-Assert/Deassert Time				100	us	
RSSI range		-29		-8	dBm	Accuracy +/-3dB

Note (1): Measured with PRBS 2³¹-1 test pattern @9.953Gbit/s, BER ≤1×10⁻³.

Note (2): When SD de-asserted, the data output is signal output.

Digital Diagnostic Monitor Interface (DDMI) Description

DDMI	Monitorscope	MonitorError
TXpower	4dBm~9dBm	±2dBm
RXpower	-8dBm~-29dBm	±3dBm
Bias	0mA~90mA	±10%
Temperature	-40°C~85°C	±3°C
Vcc	3.0V~3.6V	±3%

5311XP XGS-PON SFP+ ONT

5311XP


Pin Definitions and Description

Pin No.	Pin Name	Description
1	VeeT	Tx Ground
2	SFP_Uart_Tx	SFP_Uart_Tx
3	Tx_Dis	LVTTTL input. The default setting is that laser output is disabled when this pin is asserted HIGH and laser output is enabled when this pin is LOW.
4	MOD_DEF(2)	2-Wire Serial Data I/O Pin. (SDA)
5	MOD_DEF(1)	2-Wire Serial Clock Input. (SCL)
6	MOD_DEF(0)	Internally Grounded
7	Dying Gasp / Uart_Rx	Dying Gasp or SFP Uart Rx (controlled by software)
8	LOS/SD	Set LOS is that active high when signal is detected (LVTTTL)
9	SFP_1PPS	1PPS
10	NC	NC
11	VeeR	RxGround
12	RXD-	Inverted Receiver Data Output (AC-Coupled internally)
13	RXD+	Non-Inverted Receiver Data Output (AC-Coupled internally)
14	VeeR	RxGround
15	Vcc_RX	RxVcc
16	Vcc_TX	TxVcc
17	Veet	TxGround
18	TXD+	Non-Inverted Transmitter Data Input (AC-Coupled)
19	TXD-	Inverted Transmitter Data Input (AC-Coupled)
20	Veet	TxGround

5311XP XGS-PON SFP+ ONT

5311XP

Digital Diagnostic Memory Map

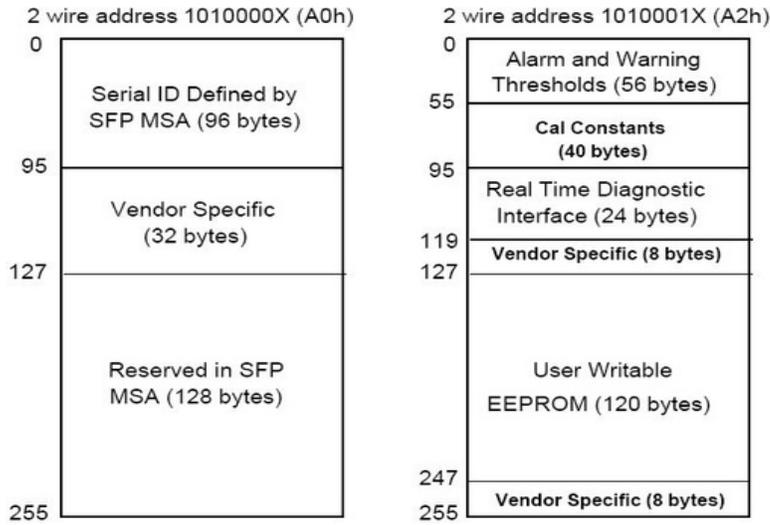


Addr.	Size (Bytes)	Name of Field	Hex	Description
0	1	Identifier	03	SFP
1	1	Ext. Identifier	04	SFP function is defined by serial ID only
2	1	Connector	01	SCConnector
3-10	8	Transceiver	000000 0000000000	TransceiverCodes
11	1	Encoding	03	NRZ
12	1	BR, Nominal	63	99*100MBd
13	1	Rate Identifier	00	Unspecified
14	1	Length (9um) km	14	Transceivertransmitdistance
15	1	Length (9um) 100m	C8	Transceivertransmitdistance
16	1	Length (50um OM2)	00	
17	1	Length (62.5um)10m	00	Transceivertransmitdistance
18	1	Length (Copper)	00	Notcompliant
19	1	Length (50um OM3)	00	
20-35	16	Vendor name	435A542020202020 20 2020 20202020 20	VendorName(ASCII)
36	1	Reserved	00	
37-39	3	Vendor OUI	000000	er
40-55	16	Vendor PN	20 2020 20202020 20 20 2020 20202020 20	VendorPartNumber
56-59	4	Vendor rev	56312E30	"V1.0"(ASCII)

5311XP XGS-PON SFP+ ONT

5311XP

Addr.	Size (Bytes)	Name of Field	Hex	Description
60-61	2	Wavelength	04F6	1270nm
62	1	Reserved	00	
63	1	CC_BASE	D9	Check code for Base ID Fields
64-65	2	Options	001A	TX_DISABLE, TX_FAULT and Loss of Signal implemented.
66	1	BR, MAX	14	Not Specified
67	1	BR, MIN	14	Not Specified
68-83	16	Vendor SN	SN (Variable)	Serial Number of transceiver (ASCII).
84-91	8	Date code	DC (Variable)	Manufactory Date Code.
92	1	Diagnostic Monitoring Type	68	Digital diagnostic monitoring implemented, "Internally calibrated" is implemented
93	1	Enhanced Options	F0	Optional Soft TX Disable control and monitoring implemented, Optional Soft TX_FAULT monitoring implemented, Optional Soft RX_LOS monitoring implemented
94	1	SFF_8472 Compliance	03	Includes functionality described in Rev10.2 SFF-8472
95	1	CC_EXT	CS (Variable)	Check sum for Extended ID Field.
96-127	32	Vendor Specific	Read only	Programmed by Factory
128-255	128	Reserved	Read only	Programmed by Factory

Mechanical

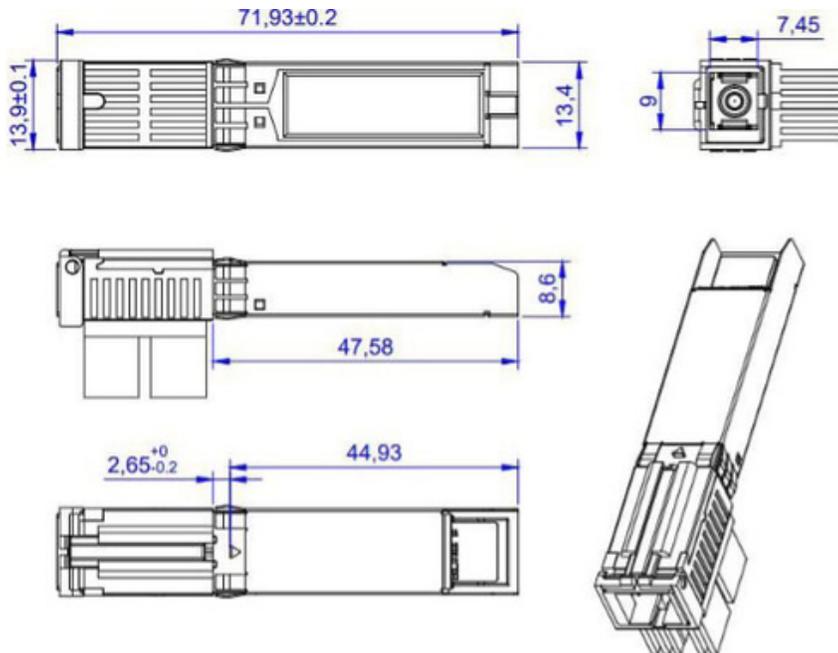



Ordering Information

Model	
HX-5311XP	XGSPON SFP+ ONT, SC/APC receptacle, 10Gbit SerDes Frammer Interface, Indoor, 3.3V, -40/+85C