


SM Simplex 3mm White Indoor/Outdoor

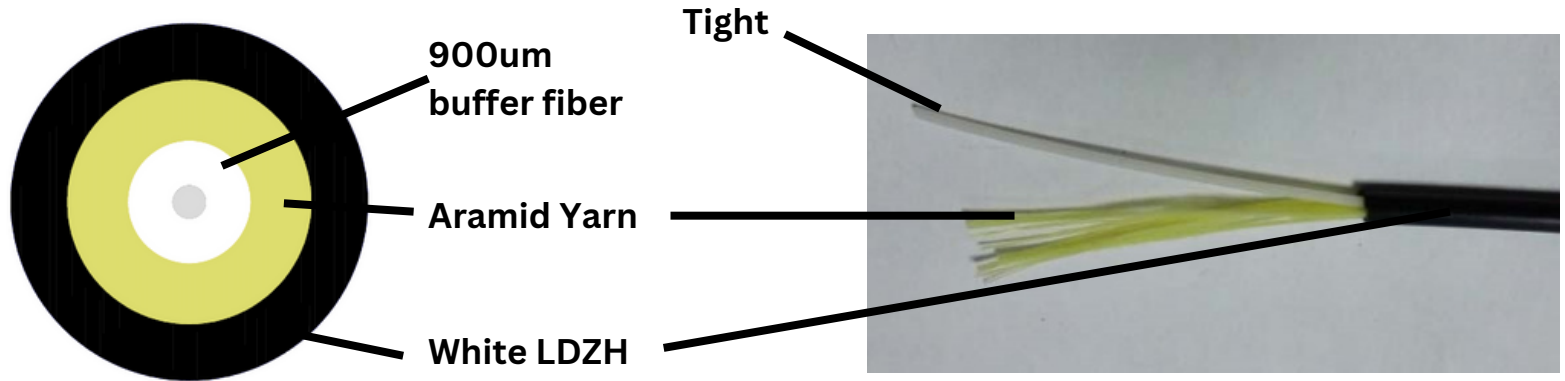

Item	Detail	Performance or Description
Surface	Outer Diameter	2.9 mm \pm 0.1mm
	Cable Color	Black/White
	Cable Type	Tight Buffer
	Environment	Indoor/Outdoor ruggedized Cables
Material	Fibers	900um tight buffer glass fiber
	Strengthen Member	Aramid Yarn
	Outer Jacket	LSZH UV rated
Fibers	Type	SM G.657A1
	Cores Account	1
	Color	White
Optical fiber Character	Attenuation	\leq 0.35 dB/km(1310nm)
		\leq 0.21dB/km(1550nm)
Mechanical Character	Tensile Resistance	Short Term 150N
		Long Term 80N
	Crush Resistance	Short Term 500N/10cm
		Long Term 100N/10cm
	Mini-bending Radius	Static $>10D$ D is the diameter of cable
Dynamic $>20D$ D is the diameter of cable		
Operating Temperature		-20°C~+60°C