

DG4244-S

DOCSIS® 3.1 WiFi 6 Voice Gateway

SERCOMM

AMT
advanced media technologies

The DG4244-S is a multi-gigabit DOCSIS® 3.1 WiFi 6 voice gateway with a 2.5Gbps + 3 1Gbps Ethernet LAN ports, 2 FXS ports, and dual-band 4x4 + 4x4 WiFi 6 built-in. This full-featured router is the hub for the home and offers customers a premium WiFi 6 experience with high-performance 2.4GHz and 5GHz radios as well as internal omni-directional antennas to cover the whole home in fast, reliable WiFi. The DG4244-S also offers two RJ-11 ports for exceptional telephony services that can be paired with an external battery backup for voice function during power outages. A 3.5mm TRS jack is available for status and monitoring of the battery backup unit.

For operators interested in other whole home WiFi options, Sercomm can also easily integrate local and cloud-based WiFi mesh software to work with your existing or preferred WiFi mesh solution.

Key Features

- ✓ DOCSIS® 3.1 CableLabs® Certified*
 - Full-Spectrum Capture Tuner
 - Software selectable low and mid split
- ✓ High-Performance WiFi 6 Integrated
 - Dual-band 4x4 2.4GHz and 5GHz Radios
 - Internal Omni-Directional Antennas
- ✓ True Multi-Gigabit Broadband Speeds
 - 2.5Gbps Eth Port + 3x1Gbps Eth Ports
- ✓ PacketCable and SIP VoIP with BBU
 - PC1.5 and SIP Supported
 - Connection to external BBU with 8 and 24 hour options




DG4244-S

DOCSIS® 3.1 Ethernet MoCA Gateway



Home Network Diagram

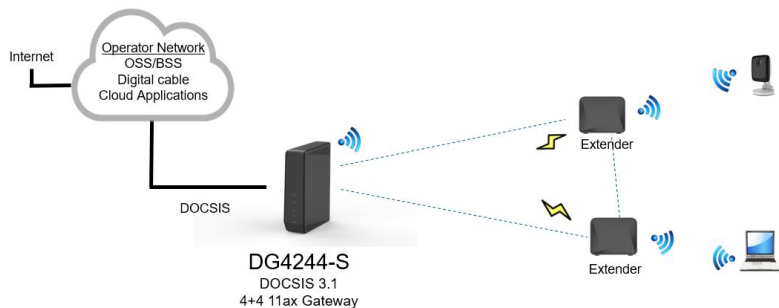

Detailed Specs

DOCSIS®		Interfaces	
Downstream		RF	75Ω F-Type External Connector
Frequency Range	108-1002MHz	Ethernet	One 10/100/1000/2.5G BASE-T LAN Port Three 10/100/1000 BASE-T LAN Ports
Channels	32 SC-QAM + 2 OFDM	USB	USB2.0 Port
Tuner	Full-Spectrum Capture	VoIP	Two RJ-11 Ports
Upstream		Power	12 VDC Input External AC/DC PSU
Frequency Range	5-42MHz or 5-85MHz (software selectable)	Battery Backup	External 3.5mm TRS for Management
Channels	8 SC-QAM + 2 OFDMA	Button	WPS, Reset
VoIP		Hardware	
Standards	PacketCable1.5 PacketCable2.0 SIP	LEDs	Power, DS/US, Online, WiFi, VoIP
Codecs	G.711, G.722, G.729	Dimensions	270 x 185 x 70mm
REN	5 REN per line (10 total)	Operating Temperature	0°C – 40°C
WiFi		Operating Humidity	5% to 95% Non-Condensing
WiFi Technology	IEEE 802.11a/b/g/n/ac/ax	Storage Temperature	-40°C – 60°C
Maximum PHY Rates	2.4GHz: 1.2Gbps 5GHz: 2.4Gbps	Storage Humidity	5% to 95% Non-Condensing
Supported Channels	2.4GHz: 1-13 5GHz: 36-48, 52-64, 100-144, 149-165	ESD	Air: 8KV Contact: 4KV Class A Cable: 3KV
Channel Bandwidth	2.4GHz: 20, 40MHz 5GHz: 20, 40, 80MHz	Surge	Ethernet: 1KV PSU: 6KV
Spatial Streams	4 SU-MIMO 4 MU-MIMO	Management	
WiFi Security	WPA3, WPA2, WPA	TR-069	
WiFi Features	WPS	SNMP	v1/v2/v3
	Up to 8 SSIDs per radio	Local webGUI	HTTP/HTTPS
	Guest WiFi		
	SoftGRE Hotspot	Certifications	
		DOCSIS® 3.1*	WiFi Alliance*
		Packetcable 1.5*	UL® 60950*
		FCC Part 15*	