

SOLUTIONS CATALOGUE

A RANGE OF SPECIALISED ACCESS SOLUTIONS FOR
TELECOMMUNICATION NETWORK INFRASTRUCTURE,
SUPPORTED BY AN INTEGRATED ACCESS MANAGEMENT
AND MONITORING APPLICATION TO OPTIMISE EFFICIENCY
AND IMPROVE NETWORK SECURITY



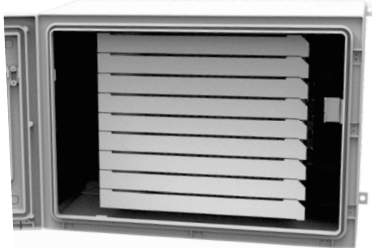
AMT
advanced media technologies

SMARTLOCK 



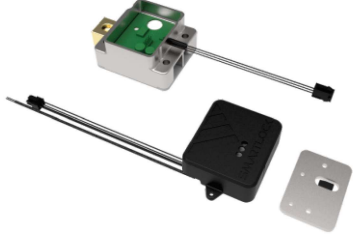
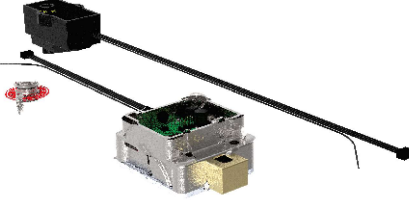
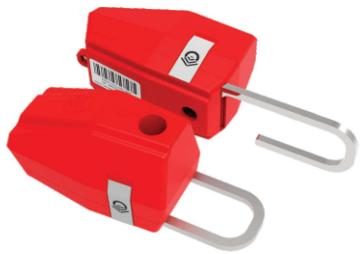
RHI-NODE ACCESS CHAMBERS

RHINODE-1000 	DAYLIGHT OPENING: 25.6" DEPTH: 39.37" WEIGHT: 216lb LOAD RATING: ANSI/SCTE 77 - TIER 22	RHINODE COMPACT -600 	DAYLIGHT OPENING: 23.62" DEPTH: 26.97" WEIGHT: 70.55lb LOAD RATING: ANSI/SCTE 77 - TIER 15
RHINODE-400 	DAYLIGHT OPENING: 12.2" DEPTH: 15.75" WEIGHT: 17.7lb LOAD RATING: ANSI/SCTE 77 - TIER 8	RHINODE-400 (Extended) 	DAYLIGHT OPENING: 12.2" DEPTH: 23.76" WEIGHT: 23lb LOAD RATING: ANSI/SCTE 77 - TIER 8
RHINODE-300 	DAYLIGHT OPENING: 7.87" DEPTH: 11.81" WEIGHT: 9.92lb LOAD RATING: ANSI/SCTE 77 - TIER 8	RHINODE-DUDC 	IP RATING: IP 68 WORKABLE RACK SPACE: 15U - 19" 22U - 19" LOAD RATING: ANSI/SCTE 77 - TIER 22

RHI-NODE FIBER TERMINATION

RHINODE-SPLICE BOX 	DIMENSIONS: 9.7" X 7.3" X 3.5" MATERIAL: SMC (SHEET MOULDED COMPOUND) ABS PLASTIC REEL SLACK CAPACITY: 39ft FIBER CAPACITY: SPLICE HOLDERS: 8-WAY 16 X PRE-TERMINATED DROP CABLES 1X8 SPLITTER 8 X LC DUPLEX / SC DUPLEX PATCH CABLES	RHINODE-WDC 	DIMENSIONS: 27.6" X 20" X 14.4" WEIGHT: 55lb MATERIAL: SMC (SHEET MOULDED COMPOUND) RACK CAPACITY: 9U - 19" RATING: IP 65
--	---	--	---

MECHATRONIC LOCKS & SENSORS

MECHATRONIC MANHOLE LOCK 	DIMENSIONS: 3.15" X 3.15" X 2.36" BODY MATERIAL: ABS PLASTIC LOCKING PIN MATERIAL: 304 STAINLESS STEEL RATINGS: IP 68 IEC 60068-2 & IEC 60529	PADLOCK 	LOCK BODY DIMENSIONS: Ø 2.6" X 2.9" BODY MATERIAL: 304 STAINLESS STEEL SHACKLE MATERIAL: Ø 0.375" BORON STEEL RATINGS: IP 67 IEC 60529
SWING HANDLE CABINET LOCK 	DIMENSIONS: 6.5" X 4.9" X 2.16" BODY MATERIAL: 304 STAINLESS STEEL DOOR CUT-OUT: 4" X 1" RATINGS: IP 67 IEC 60529	FENCE PERIMETER LOCK 	ORIENTATION: LH AND RH BODY MATERIAL: 304 STAINLESS STEEL TAMPER RESISTANCE: FAIL IN SAFE STATE RATINGS: IP 68 IEC 60529
MECHATRONIC DOOR LOCK 	DIMENSIONS: 3.15" X 3.15" X 2.36" BODY MATERIAL: 304 STAINLESS STEEL MAX. DOOR THICKNESS: 3.15" RATINGS: IP 68 IEC 60529	CABINET LOCK (SOFT KEY OPERATED) 	BODY MATERIAL: LOCK BODY: ALUMINIUM BT CONTROLLER: ABS POWER SOURCE: 12V, 24V OR 48V WEIGHT: 2.87lb
MECHATRONIC SPLIT LOCK 	BODY MATERIAL: LOCK BODY: ALUMINIUM KEY READER: ABS POWER SOURCE: PROPRIETARY INDUCTIVE CHARGING CIRCUIT WEIGHT: 2.87lb	CONTAINER LOCK 	DIMENSIONS: (LOCK BODY) 18" X 7.8" X 2.6" BODY MATERIAL: 304 STAINLESS STEEL WEIGHT: 24.25lb RATINGS: IP 67 IEC 60529
MECHATRONIC SEAL 	DIMENSIONS: 3.35" X 1.53" X 1.9" BODY MATERIAL: ABS PLASTIC SHACKLE MATERIAL: 304 STAINLESS STEEL RATINGS: IP 67 IEC 60529	NB-IOT SMART SENSOR 	DIMENSIONS: 6.6" X 4" X 1.7" BODY MATERIAL: ABS PLASTIC SENSORS: • LIGHT • TEMPERATURE • IMPACT • HUMIDITY • ACCELEROMETER RATINGS: IP 68

SMART KEYS

GSM ELECTRONIC SMART KEY



DIMENSIONS:
8.4" X 3" X 1.1"

BODY MATERIAL:
ABS PLASTIC

POWER SOURCE:
2Ah LITHIUM-ION BATTERY

RATINGS:
SPLASH PROOF
IEC 60068-2

BLUE TOOTH SMART KEY



DIMENSIONS:
4.4" X 2.52" X 1.02"

BODY MATERIAL:
ABS PLASTIC

POWER SOURCE:
1.5Ah LITHIUM-ION BATTERY

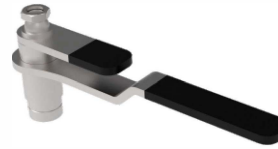
RATINGS:
SPLASH PROOF
IEC 60068-2

CHAMBER MECHANICAL KEY



MATERIAL:
304 STAINLESS STEEL

ECCENTRIC MECHANICAL KEY



MATERIAL:
304 STAINLESS STEEL

