

AXS-130 compact OTDR

OPTIMIZED FOR FTTx FIBER
DEPLOYMENTS AND TROUBLESHOOTING,
SUITABLE FOR METRO

- The AXS-130 delivers EXFO's renowned performance, reliability and durability in a compact OTDR form factor.

KEY FEATURES

- Live and dark fiber capability
- Rugged and ultra-portable, featuring a 4-inch high-visibility outdoor touchscreen
- Swap-Out connector, replaceable whenever necessary for optimal performance over time without undue service cost and downtime
- All-day battery
- Dynamic range up to 39/38/39 dB
- Triple wavelengths: 1310 nm, 1550 nm, 1650 nm
- Short dead zones: 0.5/2.5 m event dead zone (EDZ) / attenuation dead zone (ADZ), PON dead zone 30 m
- Optical link mapper (OLM) simplifying OTDR trace interpretation
- Automated macrobend detection
- Onboard PDF reporting
- 3-year warranty
- In-line power checker and source
- Integrated visual fault locator (VFL)



COMPATIBLE WITH
EXchange



APPLICATIONS

- FTTx/PON testing through splitters (up to 1x128)
- FTTx/MDU service activation: GPON, EPON, XGS-PON, 10GE EPON
- Live fiber troubleshooting
- Access network testing (P2P)
- Metro links testing (P2P)
- Passive optical LAN (POL)

RELATED PRODUCTS AND ACCESSORIES



Connector Checker™
FIP-200



Soft pulse
suppressor bag
SPSB



Swap-Out
Connector APC



Swap-Out
Connector UPC

THE ESSENTIAL CAPABILITIES OF A STATE-OF-THE-ART OTDR

TESTING MADE SIMPLE

Unnecessary complexity eliminated so any technician can easily perform tests without having to dig through layers of menus or options.




HELPING YOU FLATTEN THE LEARNING CURVE

Optical Link Mapper (OLM)

Interprets OTDR traces automatically and provides an icon-based view of the elements on the link.

- Synced with events and placed on the same screen below OTDR trace to better understand events.
- Automatic analysis of multiple wavelengths with a consolidated link view display on a single screen.
- Display of end-to-end link length, loss and ORL according to the pass/fail settings.
- Automatic parameter settings and clear go/no-go results.
- Prompt guidance on what and where the network issues are.

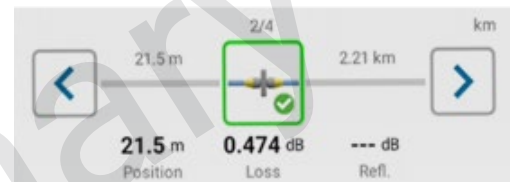

MULTIPLE WAVELENGTHS



CLEAR CONSOLIDATED LINK DISPLAY



**.SOR
FITS YOUR PROCESSES**

TESTING ESSENTIALS INTEGRATED

The AXS-130 comes with key accessories needed when working in the field with an OTDR. It integrates essential optical test tools, equipping technicians with everything they need on the job.

Included:

- In-line light source
- In-line power checker
- Visual fault locator (VFL)



OPTIMIZED DISPLAY

See key test results summarized on a single screen, including test parameters, the OTDR trace, a linear view of all events and a link map.

Portrait view

Indication and navigation over Job test IDs.

OTDR trace overview.

Linear view of all events with faulty events in red that allows zooming on specific events.

OTDR setup (selection of range, pulse and duration). Auto Mode is also available.

On/Off/Standby button, with integrated LED to indicate battery status.

Summary of global optical link parameters (length, loss and ORL).

Optical link mapper (OLM) to interpret the OTDR traces and identify element types.


Averaged OTDR measurement.

Start/Stop real-time OTDR measurement.


Landscape view

Landscape view available at the click of a button. Investigate the trace efficiently!

Zoom freely on the overall trace or on specific elements.

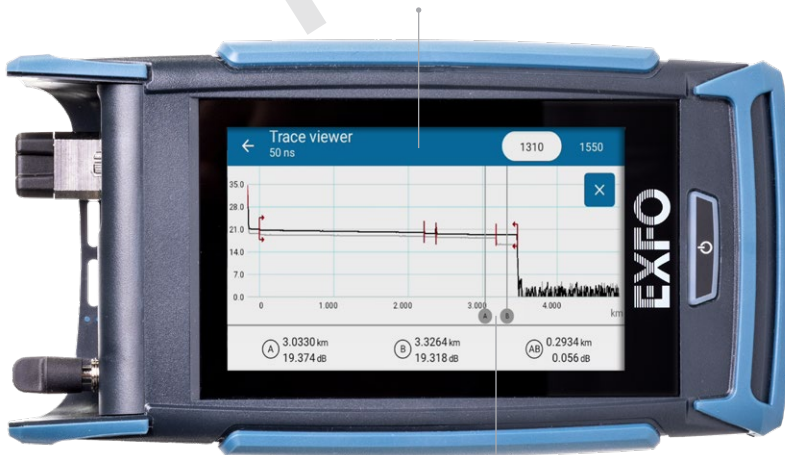

Manual measurements with two markers.

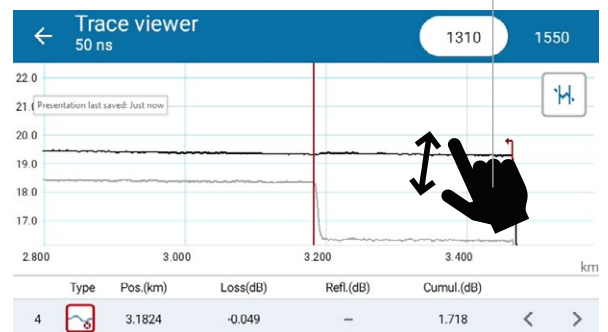

AXS-130: THE COMPACT YET MIGHTY OTDR WITH ALL ESSENTIAL FUNCTIONS TO MAKE FRONTLINE TECHNICIANS MORE EFFICIENT.

The AXS-130 compact OTDR offers a suite of diagnostic and troubleshooting tools for those instances when you need more than link verification or when KPIs do not meet expectations. These tools allow technicians to better understand the link and identify weak points or impairments.



PON Optimized Mode

This mode allows the user to enter the splitters on the optical link. The analysis automatically associates the correct splitter to the appropriate event on the trace. The Auto Mode is also optimized for PON links.



Auto Mode

Manually set acquisition parameters, such as range or duration, or enable the Auto Mode to select EXFO recommended parameters for the selected pulse width, based on the length and overall loss of the fiber cabling.



Flash-Advisor Mode: the core of the intelligent OTDR (coming soon)

Lightning-fast link verification

Flash Advisor displays the link's KPIs (link length, loss, and ORL) in under 3 seconds on the same screen as the trace and the link view. This single-ended verification test is ideal for instant length checks, sanity checks or mass volume control on high-fiber-count cables prior to or after installations and repairs.



Real-Time Mode: allows continuous testing and refreshing

Continuous monitoring

Real-Time Mode enables the continuous observation of optical fibers, allowing for the immediate detection of any changes or faults. This is especially beneficial for maintenance and troubleshooting.

Dynamic event capture


Captures dynamic events such as fiber bends, splices, and connector changes as they happen. This allows for real-time observation of how these events impact the signal without interrupting the measurement process.

Quick issue identification

For long fiber spans, Real-Time Mode facilitates the rapid identification of issues by displaying the trace as it updates. Technicians can halt the test as soon as anomalies are detected.


Live feedback

During installation or repairs, Real-Time Mode provides instant feedback, enabling technicians to make on-the-spot adjustments to parameters.

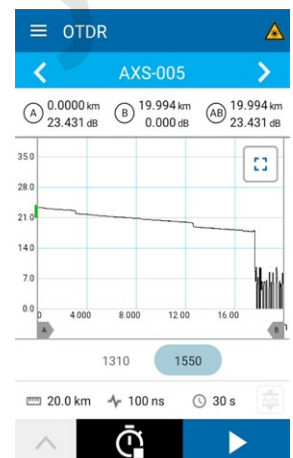

FIBER TRACING – TONE DETECTION

The AXS can be used as a light source and emit a tone that can be detected by a live fiber detector (LFD), a power meter or by another AXS unit to trace/identify a specific fiber. The AXS-130 can detect 5 different tones CW, 270 Hz, 330 Hz, 1 kHz and 2 kHz.

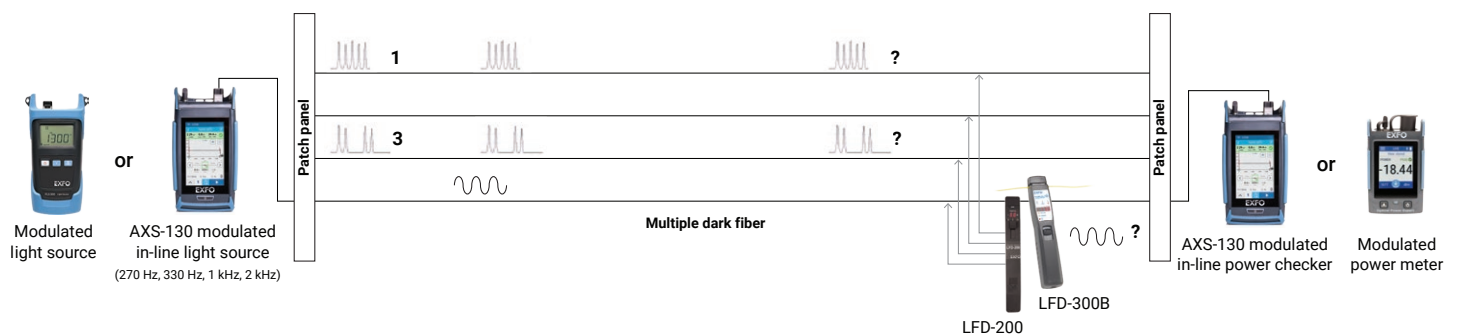

TAKING ON YOUR CAPEX AND OPEX CHALLENGES

Large instrument fleets come with hidden or unplanned costs of ownership, including:

- Technician training and support
- Maintenance costs and logistics
 - Entry connector replacement in factory
 - Extra calibration after connector replacement
 - Planned and unplanned downtime
 - Complexity of maintenance management

Did you know?

More than 90% of OTDR units sent back to the manufacturer for periodic calibration have severely damaged connectors needing replacement.

Connector health is critical to ensuring optimal performance and accurate results for optical test instruments. Optical connectors experience wear and tear in the field and degrade over time until replacement is necessary.

AXS-130 OTDR TACKLES THE ROOT CAUSES OF THESE ISSUES, SINCE IT'S DESIGNED TO ELIMINATE HIDDEN COSTS OF OWNERSHIP



Patented, field-replaceable Swap-Out connector

Self-diagnose health of unit connector. Swap it for a brand new one on the go when needed—no factory servicing costs and no downtime.



Field-replaceable all-day battery

> 10 hours of autonomy (Bellcore)



Keep your calibration plan on track

The calibration date remains valid, even after swapping the connector. No need to calibrate your unit sooner than planned.



Built-in intelligence

No learning curve and no need for remote expert assistance. Let the equipment handle it.



3-year warranty

Designed for long-term accuracy.



EXFO's proven robustness

Rugged and ready; the world's leading manufacturer of OTDRs delivers renowned robustness for field use.



DESIGNED FOR EFFICIENCY

EXFO's extensive experience in optical field testing is embedded in AXS-130. It leverages this built-in expertise to diagnose fiber link quality reliably and quickly. All this, plus its ergonomic, robust design makes AXS-130 a perfect fit for today's field technician.

- 1 OTDR port
In-line light source
In-line power checker
Swap-Out connector
- 2 Visual fault locator (VFL)
- 3 USB C charge port
- 4 Power on/off
- 5 4-inch touchscreen






**SHARE TEST RESULTS.
BOOST COMPLIANCE.
UNLOCK INSIGHTS.**

Cloud-hosted solution for sharing test results and ensuring compliance.

Paired with EXFO's leading test instruments, EXFO Exchange drives an entire ecosystem, while integrating seamlessly with existing operation processes.

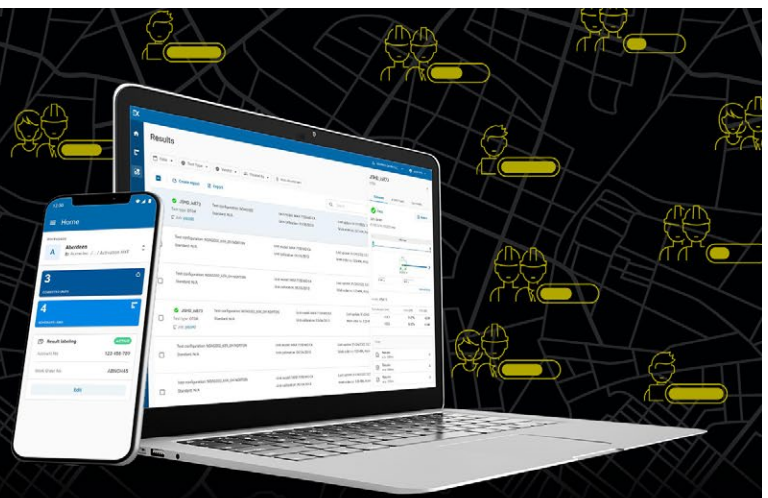

KEY BENEFITS



Automate test results management



Boost compliance and efficiency



Improve collaboration and visibility



Access comprehensive reporting



Unlock insights to see what matters

SIMPLE SETUP IN THREE STEPS

1

Create your free EXFO Exchange account

Begin your journey by creating an EXFO Exchange account. Setting up your account is quick and easy.



2

Install the mobile app

Download the EXFO Exchange app to allow test data from compatible EXFO devices to be uploaded securely to the cloud (free of charge).



For MaxTester and FTB users, install the native app.



3

Save time and boost efficiency

Once your account created—and the mobile app installed and paired with compatible EXFO devices—all test results will be sent to the cloud. On the web app, you will see field test results from all invited testers.



SPECIFICATIONS^a

TECHNICAL SPECIFICATIONS

| | |
|--|--|
| Wavelength (nm) ^b | 1310 ± 20/1550 ± 20/1650 ± 15 |
| Live wavelength (nm) | 1650, Isolation: 50 dB from 1265 nm to 1617 nm |
| Dynamic range (dB) ^c | 39/38/39 |
| Event dead zone (m) ^d | 0.5 |
| Attenuation dead zone (m) ^d | 2.5 |
| Distance range (km) | 0.65 to 200 |
| PON dead zone (m) ^e | 30 |
| Pulse width (ns) | 3 to 20 000 |
| Linearity (dB/dB) | ±0.03 |
| Loss resolution (dB) | 0.001 |
| Sampling resolution (m) | 0.04 to 5 |
| Sampling points | Up to 256 000 |
| Distance uncertainty (m) ^f | ±(0.75 + 0.0025% × distance + sampling resolution) |
| Reflectance accuracy (dB) ^b | ±2 |

GENERAL SPECIFICATIONS

| | |
|-----------------------|--|
| Size (H × W × D) | 171 mm × 93 mm × 48 mm (6 3/4 in × 3 11/16 in × 1 7/8 in) |
| Weight (with battery) | 0.5 kg (1.1 lb) |
| Display | 4 in (101.6 mm) touchscreen, 800 × 480 TFT, portrait and landscape view |
| Interfaces | One USB-C port |
| Storage | 8 GB internal memory (10 000 OTDR traces, typical) |
| Connectivity | Bluetooth®, WiFi and USB-C |
| Results format | PDF report on the unit .sor trace as per Telcordia (Bellcore), .trcx |
| Battery | Rechargeable lithium-polymer battery, USB type-C charging port connector |
| Battery autonomy | >10 hours of operation as per Telcordia (Bellcore) TR-NWT-001138 |
| Temperature | Operating: -10 °C to 45 °C (14 °F to 113 °F) Storage: -40 °C to 70 °C (-40 °F to 158 °F) ^g |
| Relative humidity | < 93 % non-condensing |
| Data management | FastReporter, EXFO Exchange |
| Adapters | Multiple changeable adapters to fit any optical connectors: SC, FC, LC, and more |

IN-LINE POWER CHECKER^{b, h}

| | |
|--|--|
| Power range (dBm) | -60 to 23 |
| Power uncertainty (dB) ^{i, j} | ±0.5 |
| Calibrated wavelengths (nm) | 1310, 1490, 1550, 1625, 1650 |
| Selectable wavelengths (nm) | 1310, 1490, 1550, 1577, 1625, 1650 |
| Tone detection | CW, 270 Hz, 330 Hz, 1 kHz, 2 kHz, 1 kHz + Blink, 2 kHz + Blink |

IN-LINE SOURCE

| | |
|---------------------------------|--|
| Output power (dBm) ^k | -3 |
| Modulation | CW, 270 Hz, 330 Hz, 1 kHz, 2 kHz, 1 kHz + Blink, 2 kHz + Blink |

a. All specifications valid at 23 °C ± 2 °C with an FC/APC connector, unless otherwise specified.

b. Typical.

c. Typical dynamic range with longest pulse and three-minute averaging at SNR = 1.

d. Typical, for reflectance from -55 dB, using a 3-ns pulse.

e. Non-reflective FUT, non-reflective splitter, 13-dB loss, 100-ns pulse, typical value.

f. Does not include uncertainty due to fiber index.

g. -20 °C to 60 °C (-4 °F to 140 °F) with the battery pack. To preserve optimal battery performance, do not expose to high storage temperatures for extended periods of time.

h. Specifications valid when OTDR not in operation or in idle mode.

i. At calibrated wavelengths.

j. Requires a good entry connector's health.

k. Typical output power is given at 1550 nm.




IN-LINE PON POWER METER WITH OPM2 IN OPTION a, b

| | |
|-----------------------------|--|
| Power range (dBm) | -60 to 23 |
| PON power meter (nm) | Two channels: 1490/1550 and 1490/1577 |
| Power uncertainty (dB) c, d | ±0.5 |
| Calibrated wavelengths (nm) | 1310, 1490, 1550, 1625, 1650 |
| Selectable wavelengths (nm) | 1310, 1490, 1550, 1577, 1625, 1650, 1490/1550, 1490/1577 |

VISUAL FAULT LOCATOR (VFL)

| |
|---|
| Laser, 650 nm ± 10 nm |
| CW/Modulate 1 Hz |
| Typical P _{out} in 62.5/125 µm: > 0 dBm (1 mW) |
| Laser safety: Class 2 |

LASER SAFETY (complies with FDA 1040.10 and IEC 60825-1:2014-05)



YOUR AXS-130 STARTER KIT



ACCESSORIES (optional)

| | |
|------------------|---|
| GP-10-061 | Small size soft carrying case |
| GP-10-071 | Medium size soft carrying case |
| GP-1008 | VFL adapter (2.5 mm to 1.25 mm) |
| GP-2269 | USB-A to USB-C cable (for data transfer to PC) |
| GP-2311 | SC/APC Swap-Out™ optical connector |
| GP-2312 | SC/UPC Swap-Out™ optical connector |
| GP-3150 | Rechargeable battery |
| GP-3172 | 3-in-1 accessory combining kickstand, hand strap and VFL holder (compatible with FLS-140) |



a. Typical.
 b. Specifications valid when OTDR not in operation or in idle mode.
 c. At calibrated wavelengths.
 d. Requires a good entry connector's health.

ORDERING INFORMATION

AXS-130-XX-XX-XX-XX

Optical configuration

- SM1 = 1310/1550
- SM7 = 1650 nm only
- SM8 = 1310/1550/1650 on single port

OPM option

- 00 = Without OPM2 option
- OPM2 = In-line PON power meter mode (dual band)^a

Connector

- EA-EUI-28 = APC/DIN 47256
- EA-EUI-89 = APC/FC narrow key
- EA-EUI-91 = APC/SC
- EA-EUI-95 = APC/E-2000
- EA-EUI-98 = APC/LC
- EI connectors = See section below

WiFi and Bluetooth

- 00 = With WiFi and Bluetooth
- NRF = Without WiFi and Bluetooth components

Example: AXS-130-SM7-OPM2-NRF-EA-EUI-91

a. Available with SM7 model.

EI CONNECTORS



To maximize the performance of your OTDR, EXFO recommends using APC connectors on singlemode port. These connectors generate lower reflectance, which is a critical parameter that affects performance, particularly in dead zones. APC connectors provide better performance than UPC connectors, thereby improving testing efficiency.

Note: UPC connectors are also available. Simply replace EA-XX by EI-XX in the ordering part number. Additional connector available: EI-EUI-90 (UPC/ST).

Preliminary

