

Denomination:

Compact anchoring clamp for ADSS cables.

Description:

Compact anchoring clamp composed open conical plastic body, a pair of plastic wedges and a flexible handle equipped with a plastic ring.

The wedges secure the cable as they slide over the conical body.

The handle is locked onto the clamp body and manually reopened when not fully loaded.

All parts are kept together to prevent loss during installation.

Application:

The compact anchoring clamps are designed for ADSS aerial cables in telecommunication networks.

Different models are available that adapt to different cable diameters.

Benefits:

Light and safe product.

Easy to assemble, the installation does not require tools, taking just a few seconds.

Flexible handle offers extra protection to the cable against vibrations.

Insulation from 4 kV to 11 kV.

Material:

The clamp, wedges and ring are in thermoplastic polyamide PA 6.6 with UV protection.




Flexible handle is in AISI 304 stainless steel.

Technical Features:

Distribution network with a range of ≤150 meters between poles.

Anchoring ADSS cables from 5 to 13 mm.

Minimum breaking load of ≥ 450 daN.

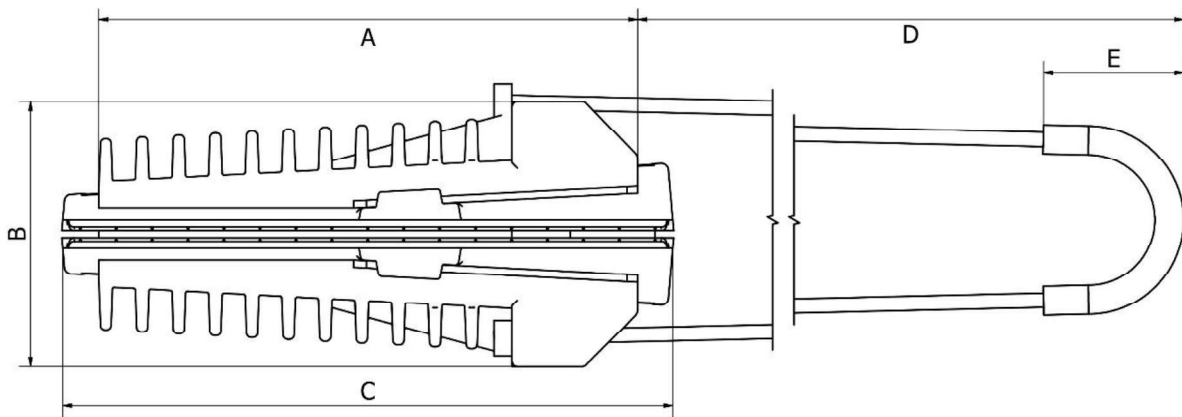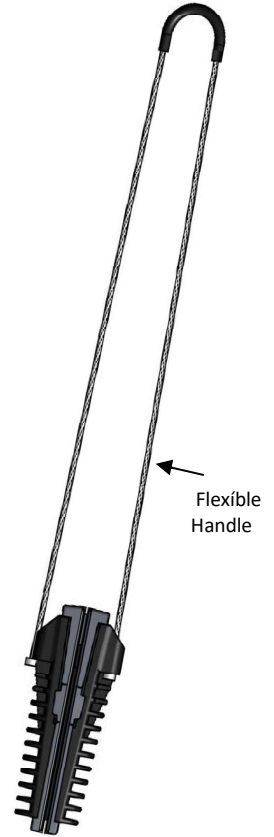

REFERENCE	Model	CAPACITY (mm)	BREAKING LOAD MIN. (daN)	DIMENSION (mm)				
				A	B	C	D	E
9113852094	ADSS 6C (5-8)	5-8	≥ 450	150	74	170	455	36
9113852096	ADSS 8C (7-10)	7-10	≥ 450	150	74	170	455	36
9113852098	ADSS 10C (9-13)	9-13	≥ 450	150	74	170	455	36

Packaging:

Quantity per box = 50 un.

ELABORATED

APPROVED

RL

HF

Parque industrial de Adaúfe,
Rua Primeiro Cabo Baltazar Abreu Simões,
Lote 19 - 20, Apartado 1091



Call Us: 954.427.5711
Toll Free: 888.293.5856