

Description:

5/8" x 10" Square head machine bolt with nut.

Reference:

9123870100

Technical Characteristics:

Used for fastening poleline hardware to crossarms, poles, and other structures.

Has a formed "cone point" to ease attachment of nut.

The "J" and "307A" marking appears on the head of the bolt conforms ASTM specification A307 Grade A.

Hot dip galvanized to meet ASTM Specification F2329.

Supplied with attached square nut.

Minimum tensile strength: 13,550 lbf.


Recommended torque value: 73 ft lb.

Minimum thread length is 6".

Material conforms to ASTM specification A307.

Dimensions conform to ASME B18.2.1.

Weight per unit: 0,440 kg.

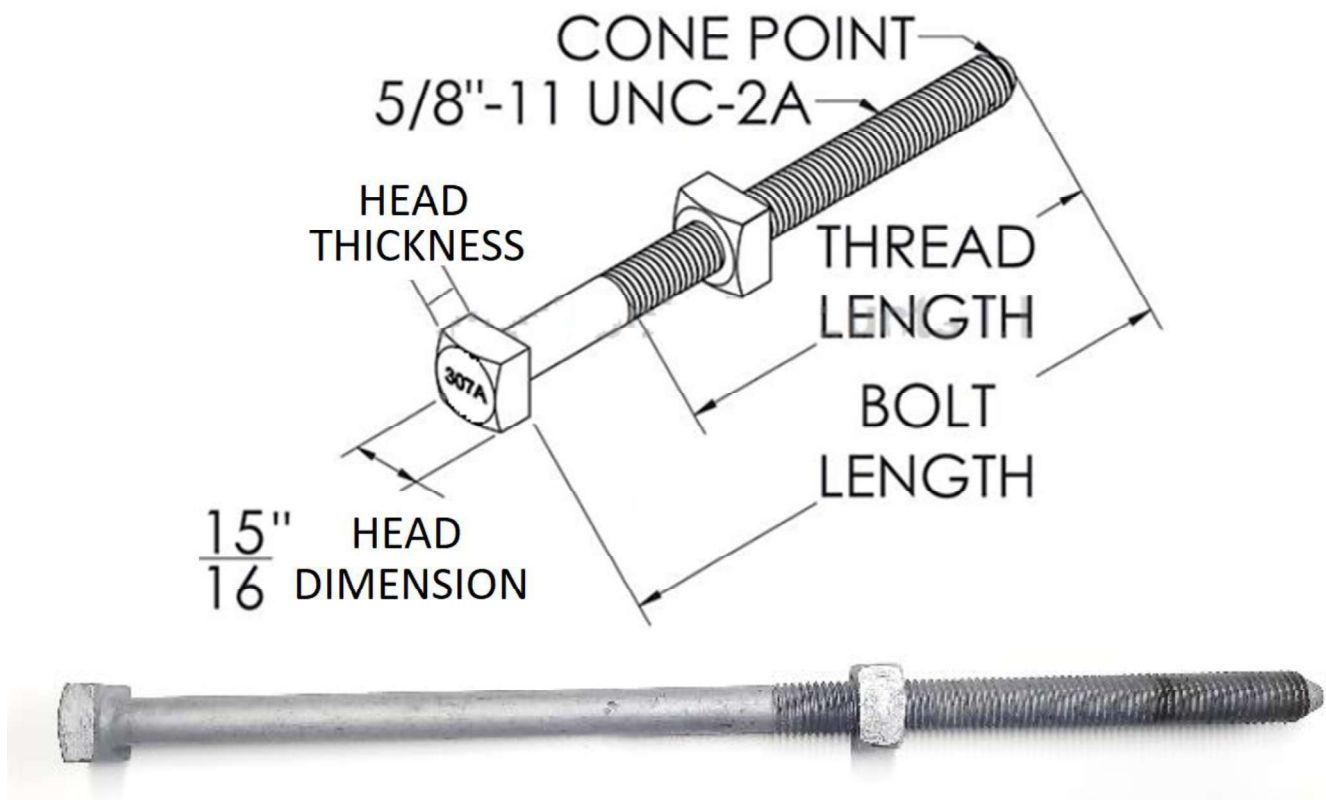

SQUARE HEAD DIMENSION	SQUARE HEAD THICKNESS	BOLT THREAD DIAMETER	BOLT STUD DIAMETER	BOLT TOTAL LENGTH	BOLT THREAD LENGTH	BOLT TIP	SQUARE NUT DIMENSION	SQUARE NUT THICKNESS	SQUARE NUT THREAD HOLE
15/16" (23,8 MM)	(11,5 MM)	5/8"-11 UNC-2A (15,88 MM)	(14,6 MM)	10" (254 MM)	6" (152,4 MM)	CONE POINT	(24,9 MM)	(13,9 MM)	5/8"-11 UNC-2A

ELABORATED

RL

APPROVED

HF



TECHNICAL SPECIFICATION

REVIEW

DATE

PAGE

5/8" x 10"
SQUARE HEAD MACHINE BOLT WITH NUT
9123870100

0

03.12.2022

1 OF 2

Label:

Barcode EAN13

Size 100x100 mm

5/8"x10" SQUARE HEAD MACHINE BOLT
WITH NUT



CODE: 9123870100

QUANTITY: 40 PCS

Packaging:

Box Quantity: 40 pcs

Box Gross Weight: 18 kg

Box Dimension: 390x195x120 mm

Pallet Quantity: 72 boxes / 2880 pcs

Pallet Dimension: 1200x800x900 mm

Pallet Gross Weight: 1316 kg

ELABORATED

RL

APPROVED

HF

Parque industrial de Adaúfe,
Rua Primeiro Cabo Baltazar Abreu Simões,
Lote 19 - 20, Apartado 1091



Call Us: 954.427.5711
Toll Free: 888.293.5856