

Description:

5/8" x 14" Square head machine bolt with nut

Reference:

9123870110

Technical Characteristics:

Used for fastening polyline hardware to crossarms, poles, and other structures.

Has a formed "cone point" to ease attachment of nut.

The "J" and "307A" marking appears on the head of the bolt conforms to ASTM specification A307 Grade A.

Hot dip galvanized to meet ASTM Specification F2329.

Supplied with attached square nut.

Minimum tensile strength: 13,550 lbf.


Recommended torque value: 73 ft lb.

Minimum thread length is 6".

Material conforms to ASTM specification A307.

Dimensions conform to ASME B18.2.1.

Weight per unit: 0,550 kg.

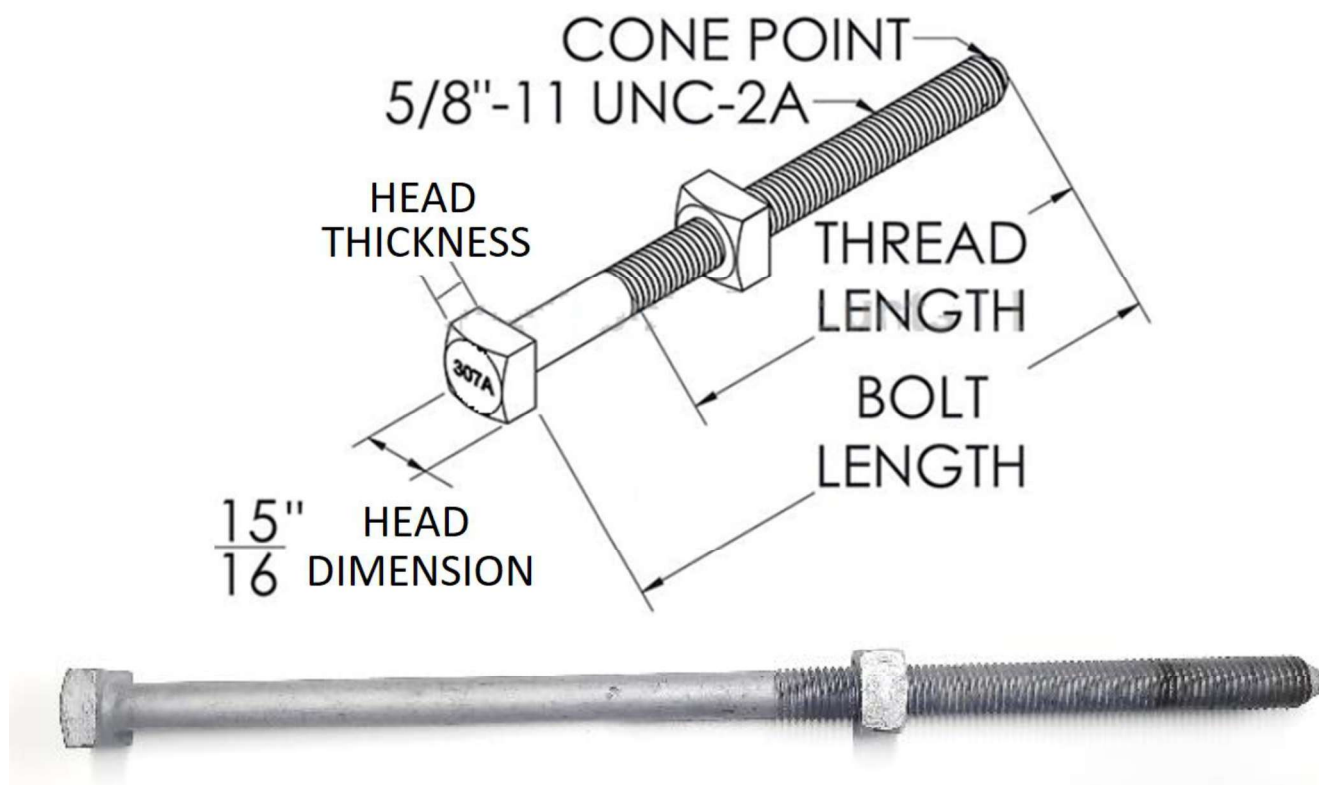

SQUARE HEAD DIMENSION	SQUARE HEAD THICKNESS	BOLT THREAD DIAMETER	BOLT STUD DIAMETER	BOLT TOTAL LENGTH	BOLT THREAD LENGTH	BOLT TIP	SQUARE NUT DIMENSION	SQUARE NUT THICKNESS	SQUARE NUT THREAD HOLE
15/16" (23,8 MM)	(11,5 MM)	5/8"-11 UNC-2A (15,88 MM)	(14,6 MM)	14" (355,6 MM)	6" (152,4 MM)	CONE POINT	(24,9 MM)	(13,9 MM)	5/8"-11 UNC-2A

ELABORATED

RL

APPROVED

HF




TECHNICAL SPECIFICATION

5/8" x 14"
SQUARE HEAD MACHINE BOLT WITH NUT
9123870110

REVIEW	DATE	PAGE
0	03.12.2022	1 OF 2

Label:

Barcode EAN13
Size 100x100 mm

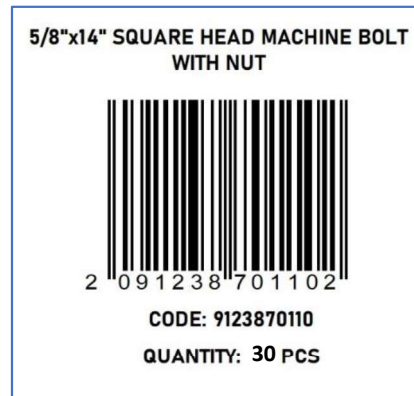

Packaging:

Box Quantity: 30 pcs
Box Dimension: 490x195x120 mm
Box Gross Weight: 17,0 kg
Pallet Quantity: 70 boxes / 2100 pcs
Pallet Dimension: 1200x800x1050 mm
Pallet Gross Weight: 1215 kg

ELABORATED

APPROVED

RL

HF

Parque industrial de Adaúfe,
Rua Primeiro Cabo Baltazar Abreu Simões,
Lote 19 - 20, Apartado 1091

