

5/8" X 14" STRAIGHT GUY BOLT
 9123870410

0

07.12.2022

1 OF 2

Description:


5/8" x 14" Straight Guy Bolt

Reference:

9123870410

Technical Characteristics:

Used for dead-ending and attaching guy wires to poles and crossarms.
 Production date "YY/WW" and bolt dimension "5/8x14" marking appears on each bolt.
 Supplied with cone point to ease assembly with nut.
 Supplied with an attached square nut.
 Steel forged thimble eye bolt.
 Hot dip galvanized to meet ASTM Specifications F2329.
 Minimum thread length is 6".
 Recommended torque value: 73 ft lb.
 Minimum Tensile Strength: 13,550 lbf
 Weight per unit: 0,930 kg.

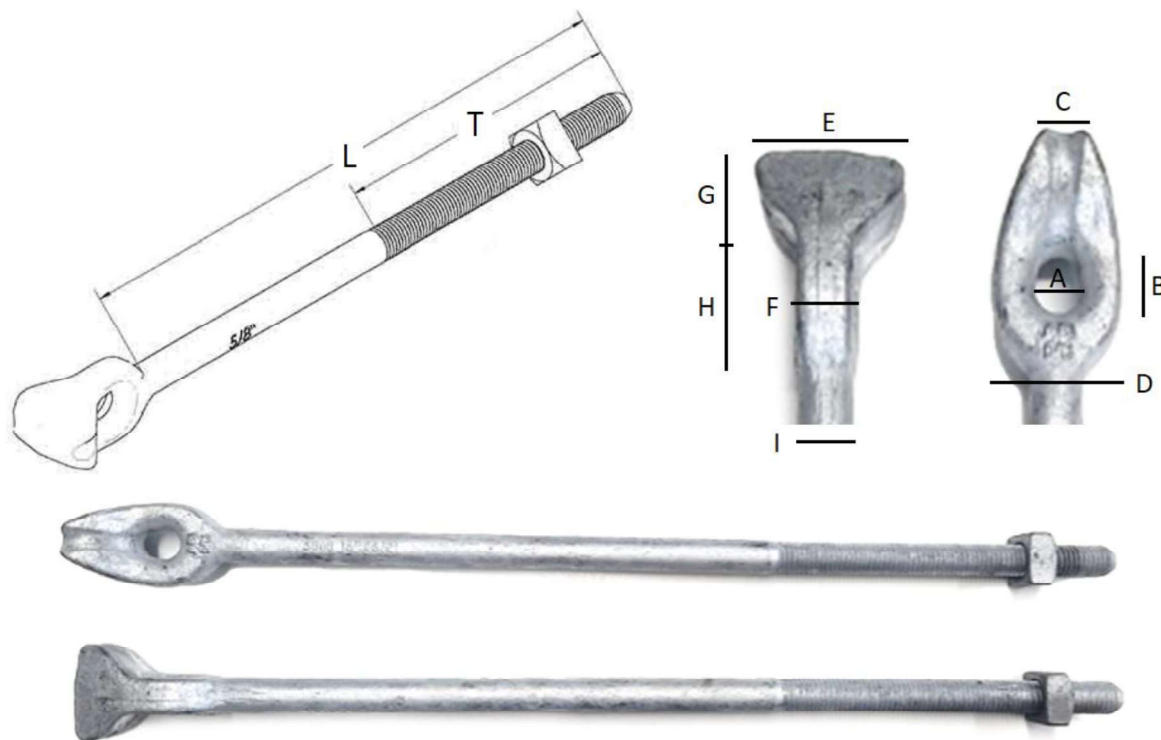

HEAD HEIGHT (G,H)	HEAD SIDE WIDTH (E,F)	HEAD FRONT WIDTH (C,D)	HEAD HOLE (A,B)	BOLT THREAD DIAMETER	BOLT STUD DIAMETER (I)	BOLT TOTAL LENGTH (L)	BOLT THREAD LENGTH (T)	BOLT TIP
(G: 30 MM) (H: 35 MM)	(E: 45 MM) (F: 17,3 MM)	(C: 15,1 MM) (D: 39,3 MM)	(A: 14,2 MM) (B: 19,1 MM)	5/8"-11 UNC-2A (15,88 MM)	5/8" (15,88 MM)	14" (355,6 MM)	6" (152,4 MM)	CONE POINT

SQUARE NUT DIMENSION	SQUARE NUT THICKNESS	SQUARE NUT THREAD HOLE
(24,9 MM)	(13,9 MM)	5/8"-11 UNC-2A

ELABORATED

RL

APPROVED

HF



5/8" X 14" STRAIGHT GUY BOLT
9123870410

0

07.12.2022

1 OF 2

Label:

Barcode EAN13

Size 100x100 mm

**Packaging:**

Bag Quantity: 25 pcs

Bag Gross Weight: 22 kg

Case Quantity: 55 bags / 1375 pcs

Case Dimension: 1100x1000x900 mm

Case Gross Weight: 1232 kg

ELABORATED

APPROVED

RL

HF

Parque industrial de Adaúfe,
Rua Primeiro Cabo Baltazar Abreu Simões,
Lote 19 - 20, Apartado 1091



Call Us: 954.427.5711
Toll Free: 888.293.5856