

# JUMPER SLEEVE

## Easy to Use Connector Tool

### PCT-JS



## The Easiest and Most Reliable Way to Make an F-Connection

### END TO END MANUFACTURING

The PCT-JS patented jumper sleeve creates a built-in tool for easy, hand tightened, reliable connections. This innovative jumper sleeve allows the proper amount of hand tightened torque with out damaging connections.\*

Once the PCT-JS is installed onto a jumper, the clear design provides visibility to the connector.

- ✓ Flexible, oval design provides superior tool-less torque
- ✓ No over tightening
- ✓ Allows clear view of connector
- ✓ Easy to install
- ✓ PCT-made connectors, coaxial cable and jumpers
- ✓ Recommended for use with products able to tolerate 5-10 in lbs of torque
- ✓ US Patent Nos. 7837501 B2, 8065940 B2

### Ordering Information

- PCT-JS Jumper Sleeve for TRS Connectors

Another Clearly Innovative Solution  
by PCT International



**Easy 1-2-3 Assembly and Use**

1. Install the PCT-JS jumper sleeve onto a jumper assembly (connector that has been correctly compressed onto coaxial cable) by inserting the connector into the slotted end of the jumper sleeve. (see Figure 1)
2. PCT-JS is completely mounted when an audible “Click” is heard. (see Figure 2)
3. Install the PCT-JS jumper with jumper sleeve onto the unit by guiding the connector into the appropriate F-81 port and rotating the jumper sleeve clockwise until finger tight.\* (see Figures 3 & 4)

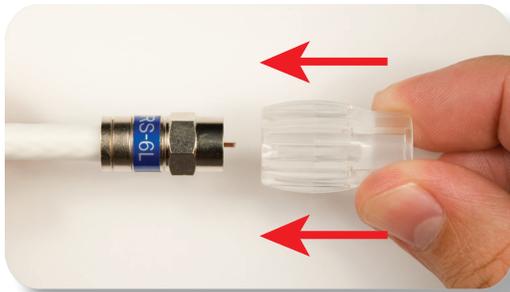


Figure 1



Figure 2

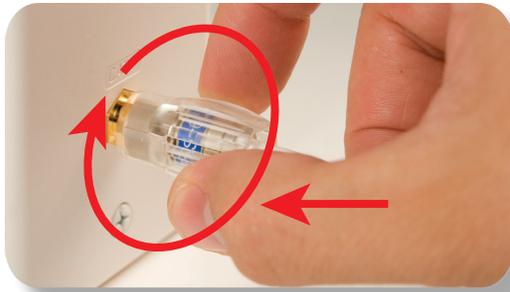


Figure 3




Figure 4



PCT-JS  
Jumper Sleeve



PCT-JS  
(shown installed onto PCT-JTRS6LA jumper)

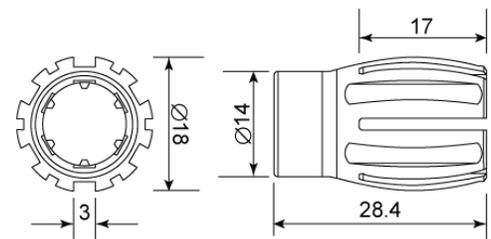

PCT-JS Dimensions  
(mm)

**Specifications**

| Parameters                  | Unit    | PCT-JS  |
|-----------------------------|---------|---|
| <b>General</b>              |         |   |
| Construction Material       | --      | Transparent Acrylonitrile Butadiene Styrene (ABS) |
| Operating Temperature Range | C / F   | -40 to +60° / -40 to +140°                        |
| Used with Connector Types   | --      | F-Type Universal                                  |
| Dimensions (W x H x D)      | mm / in | 28.4 x 18 mm / 0.093 x 0.059                      |
| Weight                      | g / oz  | 1.865 / 0.066                                     |

Note: \* This product is only recommended for use with products able to tolerate 5 to 10 in lbs of torque.