



The **NXG-IP** module is part of Blonder Tongue’s flagship NeXgen Gateway (NXG) platform that provides IP input and output connectivity to the NXG backplane.

The **NXG-IP** accepts incoming MPEG-2 or H.264 IP transport streams in an SPTS format.

The module supports up to 256 SPTS per 1Gb RJ45 Ethernet port. Full-duplex for a total capacity of up to 1024 SPTS inputs, and 1024 SPTS outputs per module.



Features

- Each port can be configured as an input and/or output port
- Each port supports up to 256 SPTS
- Supports up to 1024 SPTS full-duplex per module

Ordering Information

Model	Stock #	Description
NXG-IP	6798	IP Module SPTS - 256 Input/256 Output IP Streams; 4xGbE Ports

Made in U.S.A.

Rev: 071818
Blonder Tongue is ISO 9001:2015 Certified



Specifications

Input

IP:	2.2 Gb via RJ45 Connectors
Video Codecs:	MPEG2 or H.264
Addressing:	Multicast or Unicast
MPEG TS:	SPTS Full-Duplex
Management:	IGMPv2 & IGMPv3

Output


IP:	2.2 Gb via RJ45 Connectors
Video Codecs:	MPEG2 or H.264
Addressing:	Multicast or Unicast
MPEG TS:	SPTS Full-Duplex

Dimensions (W x D x H):	1.15 x 15.5 x 7.0 inches (29 x 394 x 178 mm)
Power:	Via NXGMmainframe back plane
Power Consumption:	11 W
Weight:	2.0 lbs (0.9 kg)
Operating Temperature:	32 to 122 °F (0 to 50 °C)
Storage Temperature:	-13 to 158 °F (-25 to 70 °C)
Operating Humidity:	0 to 95% RH @ 35 °C max, non-condensation
Storage Humidity:	0 to 95% RH @ 35 °C max, non-condensation

Alarms/Monitoring

Front Panel Indicator:	1x Status LED
------------------------	---------------

System Overview

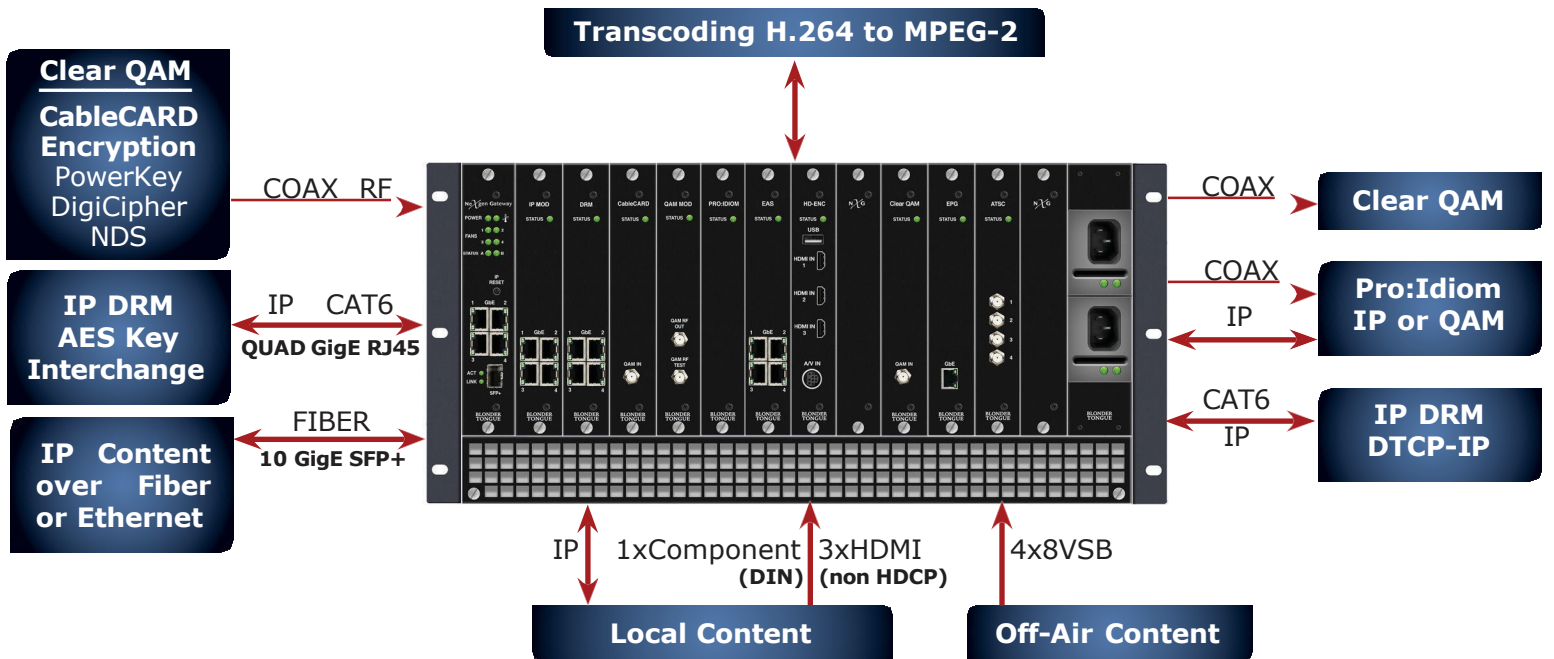

©2018 Blonder Tongue Laboratories, Inc. All Rights Reserved. **Specifications subject to change without notice.** All trademarks are property of their respective owners.